



CROSS SECTION

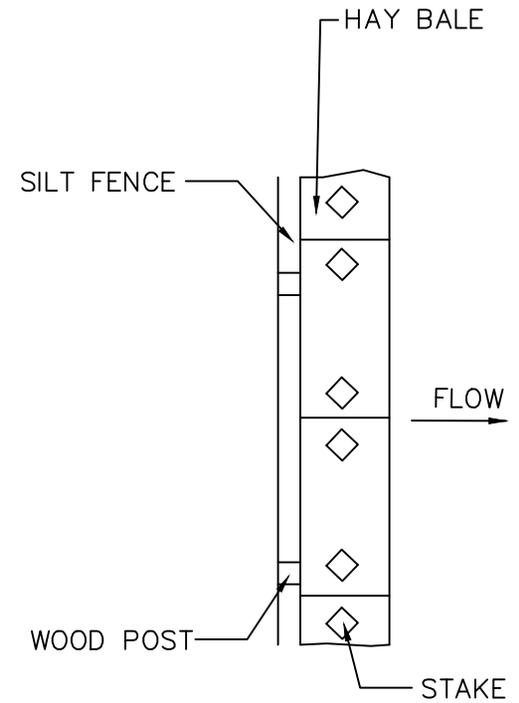


PLAN VIEW

NOTE:

1. FILTER CLOTH SHALL BE FASTENED SECURELY TO POSTS WITH WIRE TIRES OR STAPLES AND POSTS SHALL BE SPACED EVERY 10 FT.
2. WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER THEY SHALL BE OVERLAPPED BY 6 INCHES AND FOLDED.
3. ENTRENCH SILT FENCE BUT NOT HAY BALES
4. INSPECTION SHALL BE FREQUENT AND REPAIR OR REPLACEMENT SHALL BE MADE PROMPTLY AS.

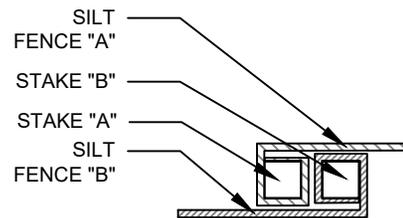

SECTION JOINT DETAIL

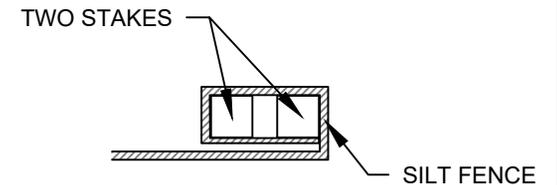

END SECTION JOINT DETAIL



SILT FENCE

City of Lowell Standard Specifications and Details

Spec. Ref #:

Date: 10/01/2025

Scale: N.T.S.