

NOTE:

- DRIVEWAYS SHALL BE CONSTRUCTED IN CONFORMANCE WITH THE AMERICANS WITH DISABILITIES ACT.

CEMENT CONCRETE
(SEE CONCRETE SIDEWALK SECTION)


SURFACE: 6" CEMENT CONCRETE

BASE: 8" GRAVEL BORROW

HOT MIX ASPHALT
(SEE ASPHALT SIDEWALK SECTION)

SURFACE: 1.5" CLASS I BIT. CONC. PAVEMENT
2.5" CLASS I BIT. CONC. BASE COURSE

BASE: 8" GRAVEL BORROW

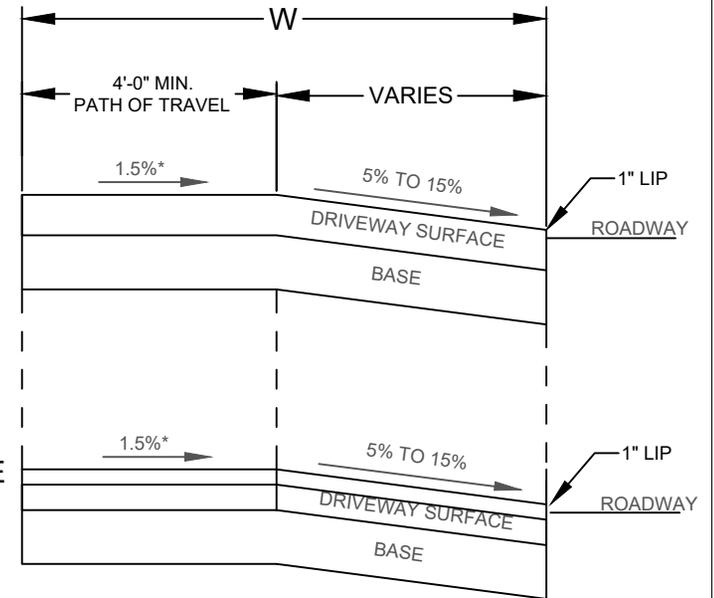

SECTION C-C

LEGEND:

- W = SIDEWALK WIDTH
- * = TOLERANCE FOR CONSTRUCTION ±0.5%
- HSL = HIGH SIDE TRANSITION LENGTH (AS REQUIRED TO MEET 7.5% MAX SLOPE)



SIDEWALK THROUGH DRIVEWAY WITH CURB RETURNS (2' CURB CORNERS)		
City of Lowell Standard Specifications and Details		
Spec. Ref #:	Date: 10/01/2025	Scale: N.T.S.