


NOTE:

1. ENTIRE TRENCH AREA SHALL BE EXCAVATED TO A DEPTH OF 16" BELOW FINISHED GRADE OF THE STREET AND EXCAVATED FROM THE PAVEMENT LINE 16" INTO THE SIDEWALK AREA.
2. TOP COURSE OF STREET PAVEMENT SHALL BE LAID TO BUTT INTO THE BERM



CURB DETAIL

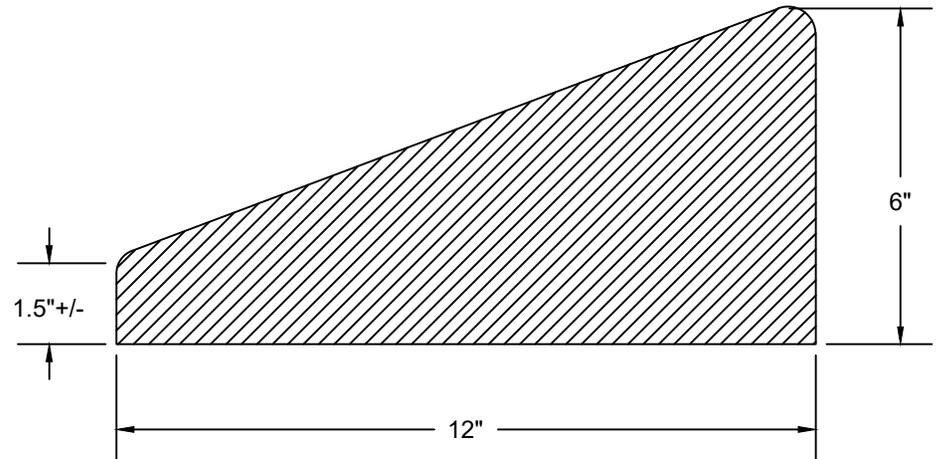

CAPE COD BERM

City of Lowell Standard Specifications and Details

Spec. Ref #:

Date: 10/01/2025

Scale: N.T.S.